

Ir. R. Verlouw
VESCOM BV
P.O. Box 70
NL-5753 AV DEURNE
NEDERLAND

your e-mail of
 2007-06-26

your reference

our reference
 PVH/6616


date
 Zwijnaarde, 2007-07-09

Analysis Report 57928

Required tests :

IMO Fire Test Procedures (1998) - Resolution A.652(16) - 1989
Recommendation on fire test procedures for upholstered furniture - smouldering cigarette test
Recommendation on fire test procedures for upholstered furniture - butane flame test


Identification number	Information given by the client	Date of receipt
T706040	Reference Composition total weight PVC weight Backing weight	Vinyl Upholstery PVC topcoat, PVC foam layer, on a PES/Co (65/35) backing approx. 800 g/m ² approx. 690 g/m ² approx. 110 g/m ²
		2007-06-27

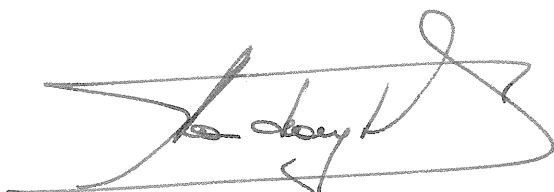

Pros Van Hoeyland
 order responsible

For further information, please contact our sectorial adviser Pros Van Hoeyland

This report runs to 3 pages and may be reproduced, as long as it is presented in its entire form, without written permission of Centexbel. The results of the analysis cover the received samples. Centexbel is not responsible for the representativeness of the samples.



Reference : T706040 - Vinyl Upholstery

IMO Fire Test Procedures (1998) - Resolution A.652(16) - 1989
Recommendation on fire test procedures for upholstered furniture - smouldering cigarette test

The following test results relate only to the ignitability of the combination of materials under the particular conditions of test ; they are not intended as a means of assessing the full potential fire hazard of the materials in use.

End of tests: 9 July 2007

A. Materials tested

- | | | | |
|---------|---|-----------------|------------------------|
| Cover | : | - quality | Vinyl Upholstery |
| | | - water soaking | no |
| Filling | : | - quality | T 23140 (Recticel) * |
| | | - density | ± 22 kg/m ³ |

* standard non-FR PU-foam (as indicated in Appendix A)


B. Smouldering cigarette test

	test nr. 1	test nr. 2
- flaming	no	no
- glowing	no	no
- smouldering > 60 min	no	no
- escalating flaming combustion	no	no
- escalating smouldering combustion	no	no
- remarks	/	/
	<u>non-ignition</u>	<u>non-ignition</u>

Conclusion : non-ignition

Performed under accreditation in the fire lab under the responsibility of Pros Van Hoeyland.

www.cenit.be/centexbel/centexbel.html



Reference : T706040 - Vinyl Upholstery

IMO Fire Test Procedures (1998) - Resolution A.652(16) - 1989
Recommendation on fire test procedures for upholstered furniture - butane flame test

The following test results relate only to the ignitability of the combination of materials under the particular conditions of test ; they are not intended as a means of assessing the full potential fire hazard of the materials in use.

End of tests: 9 July 2007

A. Materials tested

Cover	:	- quality	Vinyl Upholstery
		- water soaking	no
Filling	:	- quality	T 23140 (Recticel) *
		- density	± 22 kg/m ³

* standard non-FR PU-foam (as indicated in Appendix A)

B. Butane flame test

flame application time : 20 s

	test nr. 1	test nr. 2
- afterflame time (s)	1	1
- afterglow time (s)	0	0
- smouldering	no	no
- remarks	/	/
	<u>non-ignition</u>	<u>non-ignition</u>

Conclusion : non-ignition

Performed under accreditation in the fire lab under the responsibility of Pros Van Hoeyland.