


naltar

8083.01 - 8083.16

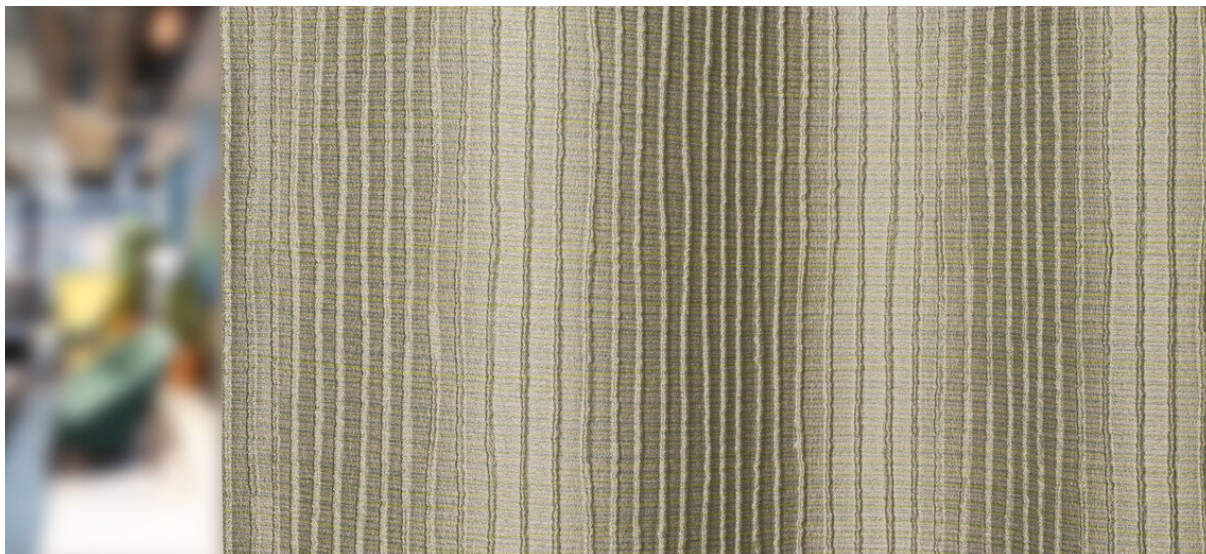

binder

curtain 01

description

double weave with a vertical organic 3D rib structure in tonal shades

composition

100% flame retardant polyester

width

± 144 cm, ± 57 inches

weight

± 273 gr/m¹, ± 9 oz/yd¹ fabrics

sound absorption

ISO 354

alphaw 0.50 (pleated)

visual & thermal comfort

EN 410/EN 14501

flame retardancy

EN 13773, class 1

BS 5867-2, type C

NF P 92/503-507, M1

DIN 4102, B1

UNI VF 8456-8457, classe 1

IMO 2010 FTP part 7

NFPA 701

CAN/ULC S109

colorfastness to crocking

ISO 105-X12

wet 4-5 / dry 4-5 (scale 1-5)

AATCC 8

wet 5 / dry 5 (scale 1-5)

colorfastness to light

ISO 105-B02

6 (scale 1-8)

AATCC 16.3: 60 hours

5 (scale 1-5)

seam slippage

ISO 13936-2

warp 2.5 mm / weft 2.7 mm

ASTM D434

warp 29 lbs / weft 29 lbs

care



shrinkage: warp: -1.4% / weft: +1.5%




STANDARD
100
S07-0023
Hohenstein HTTI



naltar


8083.01 - 8083.16



8083.01




8083.02



8083.03




8083.04




8083.05



8083.06



8083.07




8083.08



8083.09




8083.10




8083.11




8083.12




8083.13



8083.14



8083.15



8083.16