


delos

8082.01 - 8082.24

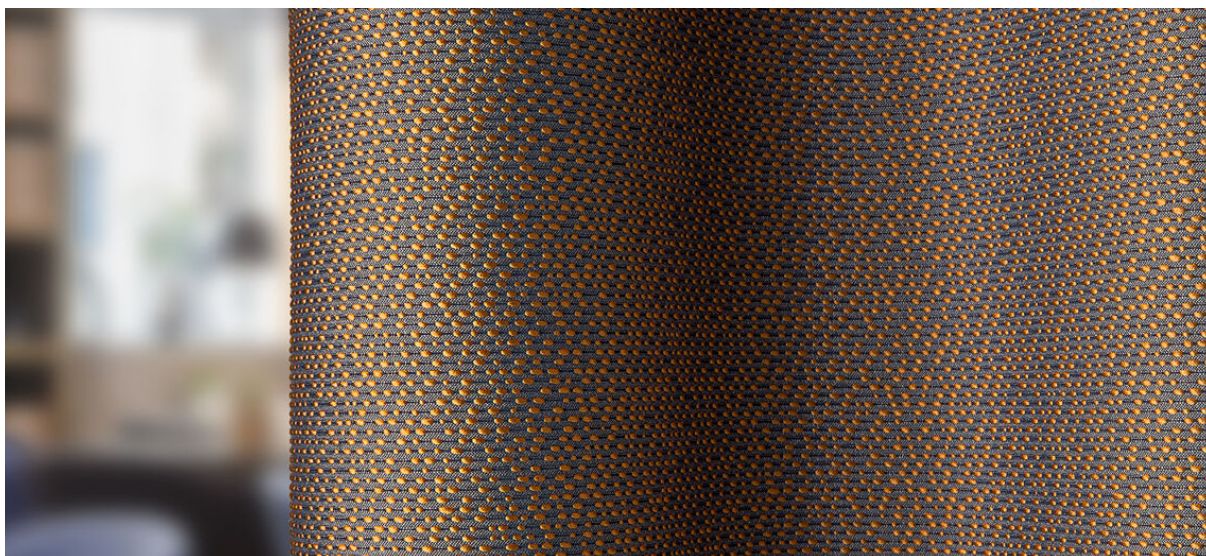

binder

curtain 01

description

allover 3D structured weave with a two-tonal coloured, sheen yarn effect

composition

100% flame retardant polyester

width

± 136 cm, ± 54 inches

weight

± 354 gr/m¹, ± 11 oz/yd¹ fabrics

flame retardancy

EN 13773, class 1

BS 5867-2, type C

NF P 92/503-507, M1

DIN 4102, B1

UNI VF 8456-8457, classe 1

IMO 2010 FTP part 7

NFPA 701

CAN/ULC S109

colorfastness to crocking

ISO 105-X12

wet 4-5 / dry 4-5 (scale 1-5)

AATCC 8

wet 5 / dry 5 (scale 1-5)

colorfastness to light

ISO 105-B02

6 (scale 1-8)

AATCC 16.3: 60 hours

4.5 (scale 1-5)

seam slippage

ISO 13936-2

warp 3.6 mm / weft 3.6 mm

ASTM D434

warp 46 lbs / weft 65 lbs

care




shrinkage: warp: -2.1% / weft: -1.5%




delos


8082.01 - 8082.24




8082.01



8082.02




8082.03




8082.04




8082.05



8082.06




8082.07




8082.08



8082.09




8082.10




8082.11




8082.12



8082.13



8082.14




8082.15




8082.16




8082.17




8082.18




8082.19




8082.20




8082.21



8082.22



8082.23



8082.24