


samar

7052.01 - 7052.51

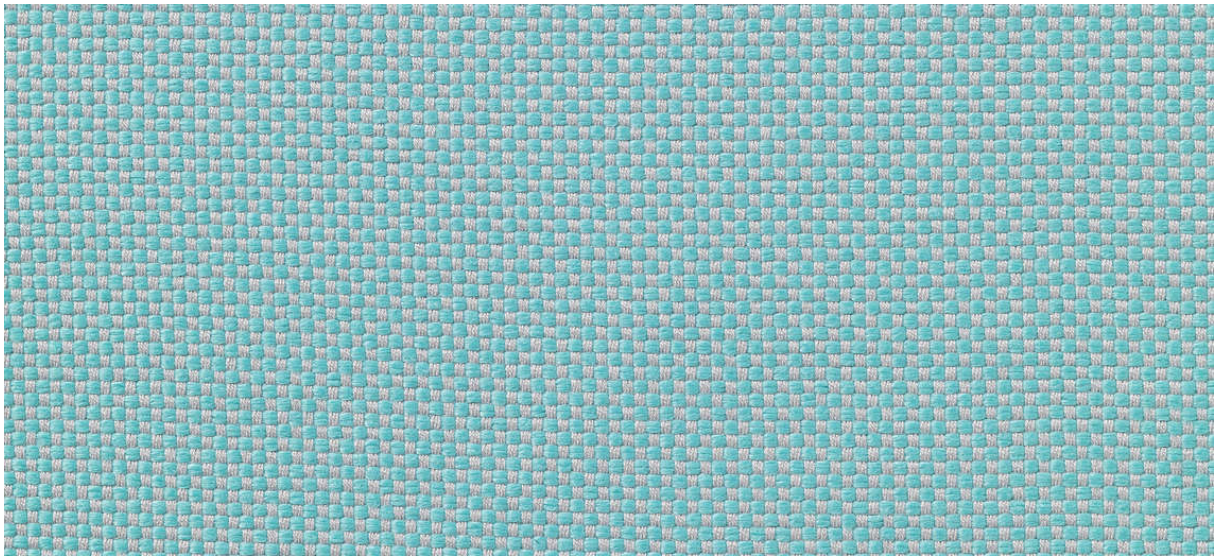

binder

upholstery 01

description

chequered weave

composition

100% flame retardant polyester

width

± 140 cm, ± 55 inches

weight

± 663 gr/m¹, ± 21 oz/yd¹ fabrics

flame retardancy

EN 1021/1-2

BS 5852, crib 5

NF P 92/503-507, M1

DIN 4102, B1

IMO 2010 FTP part 8

UNI 9175, classe 1 IM

Cal TB 117

NFPA 260, class 1

abrasion

ISO 12947-2

>50.000 rubs martindale

ASTM D4157

42.000 double rubs wyzenbeek

pilling

ISO 12945-2

4-5 (scale 1-5)

ASTM D3511

5 (scale 1-5)

colorfastness to crocking

ISO 105-X12

wet 4-5 / dry 4-5 (scale 1-5)

AATCC 8

wet 5 / dry 5 (scale 1-5)

colorfastness to light

ISO 105-B02

6 (scale 1-8)

AATCC 16.3: 40 hours

4 (scale 1-5)

seam slippage

ISO 13936 - 2

warp 3 mm / weft 2 mm

ASTM D4034

warp 99 lbf / weft 81 lbf

breaking strength

ASTM D5034

warp 31.6 lbs / weft 60.9 lbs

care



shrinkage: warp -1.6% / weft -1%



shrinkage: warp -3% / weft -1.4%



samar

7052.01 - 7052.51

