


noSS

7058.01 - 7058.24

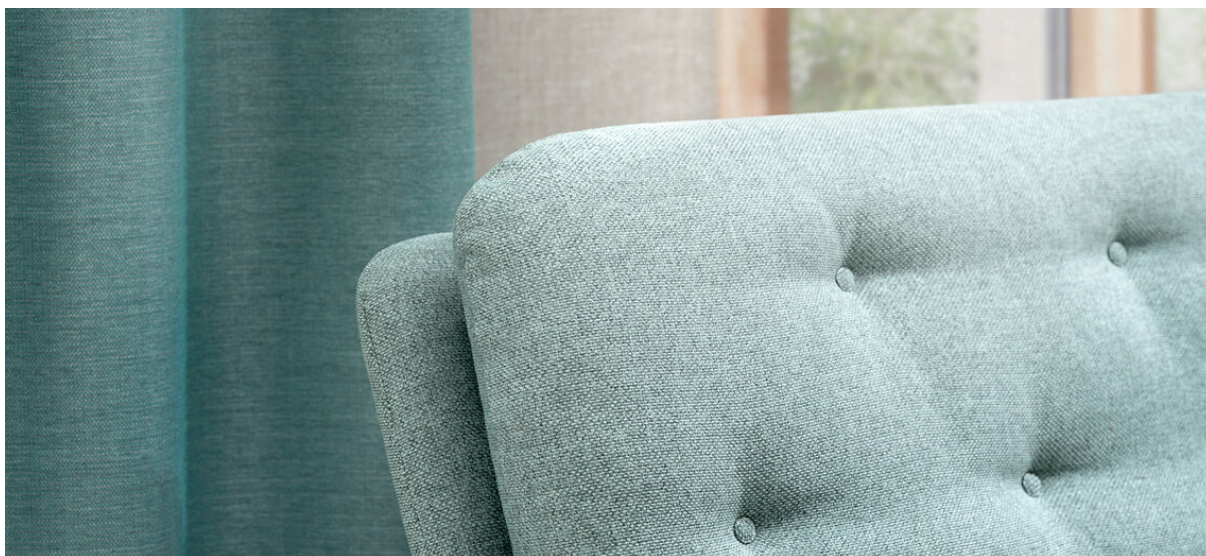

collection

**upholstery
textile**

description

woven chenille blended in soft colours

composition

100% flame retardant polyester

width

± 140 cm, ± 55 inches

weight

± 904 gr/m¹, ± 29 oz/yd¹ fabrics

flame retardancy

EN 1021/ 1-2

BS 5852, crib 5

NF P 92 / 503 - 507, M1

DIN 4102, B1

UNI 9175, classe 1 IM

Cal TB 117

NFPA 260, class 1

IMO 2010 FTP part 8

abrasion

ISO 12947-2

70.000 rubs martindale

ASTM D4157

90.000 double rubs wyzenbeek

pilling

ISO 12945-2

4 (scale 1-5)

ASTM D3511

5 (scale 1-5)

colorfastness to crocking

ISO 105-X12

wet 4 - 5 / dry 4 - 5 (scale 1-5)

AATCC 8

wet 5 / dry 5 (scale 1-5)

colorfastness to light

ISO 105-B02

6 - 7 (scale 1-8)

AATCC 16.3: 40 hours

5 (scale 1-5)

seam slippage

ISO 13936 - 2

warp 3.3 mm / weft 3 mm

ASTM D4034

warp 77 lbs / weft 91 lbs

breaking strength

ASTM D5034

warp 524 lbs / weft 337 lbs

care



shrinkage: warp -1.5% / weft -1.7%



shrinkage: warp -1.6% / weft -3%



STANDARD
100

S07-0023
Hohenstein HTTI

noss

7058.01 - 7058.24



7058.01



7058.02



7058.03



7058.04



7058.05



7058.06




7058.07



7058.08




7058.09



7058.10



7058.11



7058.12



7058.13



7058.14



7058.15



7058.16



7058.17



7058.18



7058.19



7058.20



7058.21



7058.22



7058.23



7058.24