


# leone plus

7054.01 - 7054.26

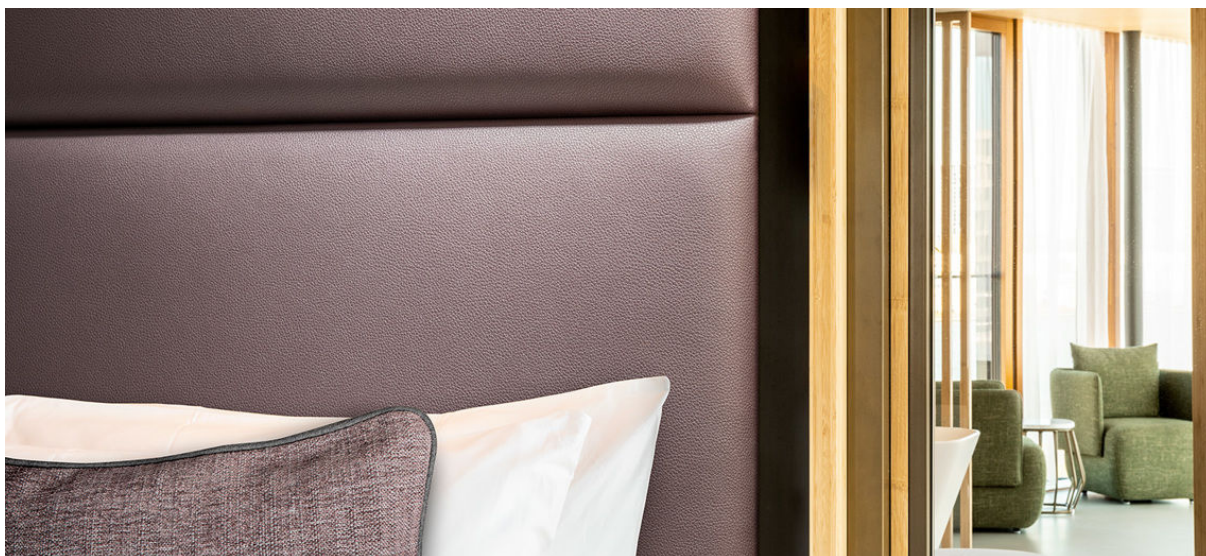

binder

upholstery

**03**

vinyl

description

**uni-coloured leather grain**

composition

**vinyl coat, cotton/polyester backing**

width

**± 140 cm, ± 55 inches**

weight

**backing: ± 110 gr/m<sup>2</sup>, ± 5 oz/yd<sup>1</sup>**

**coating: ± 690 gr/m<sup>2</sup>, ± 31 oz/yd<sup>1</sup>**

thickness

**1.1 mm, 0.04 inches**

roll length

**± 20 meter, ± 22 yards**

flame retardancy

**EN 1021/1-2**

**BS 5852, crib 5**

**NF P 92/503 - 507, M2**

**NF D60-013 (AM 18)**

**DIN 4102, B2**

**UNI 9175, classe 1**

**Cal TB 117**

**NFPA 260, class 1**

**IMO 2010 FTP part 8**

abrasion

**ISO 12947-2**

> 125.000 rubs martindale

**ASTM D4157**

50.000 double rubs wyzenbeek

colorfastness to crocking

**ISO 105-X12**

wet 5 / dry 5 (scale 1-5)

**AATCC 8**

wet 4-5 / dry 4 (scale 1-5)

colorfastness to light

**ISO 105-B02**

8 (scale 1-8)

**AATCC 16.3: 40 hours**

5 (scale 1-5)

resistance to urine

**good**

resistance to sebum

**good**

breaking strength

**ISO 1421**

length 475 N / width 320 N

**ASTM D5034**

warp 113 lbs / weft 90 lbs

flexibility

**ISO 5402**

> 20.000



vinyl  COMMITTED TO SUSTAINABLE DEVELOPMENT

# leone plus

7054.01 - 7054.26

