


# arrow

7055.01 - 7055.23

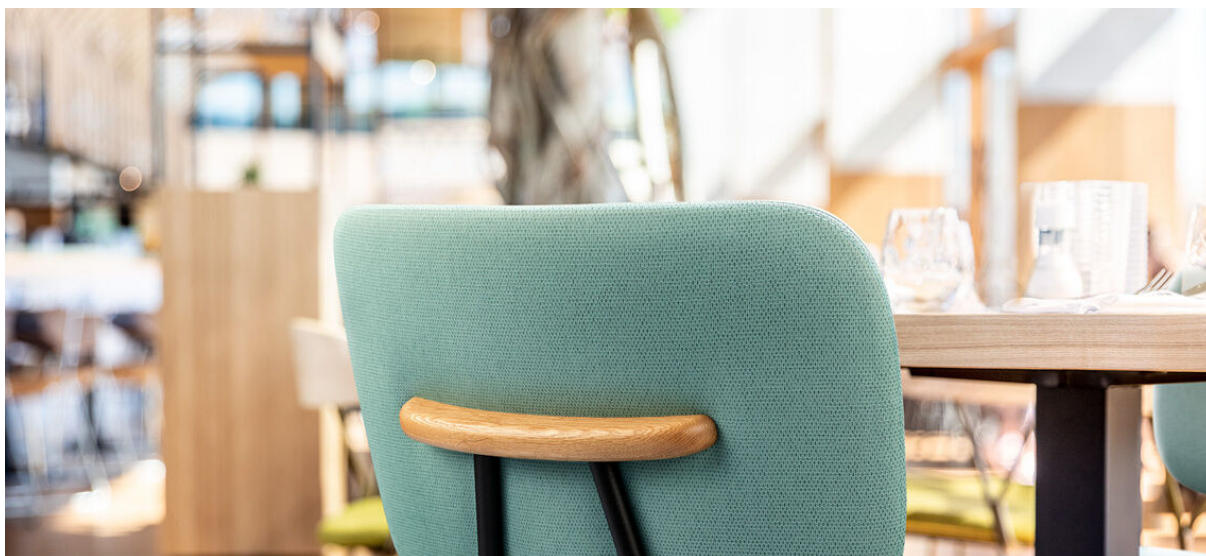

collection

upholstery

vinyl

description

**two-tone weave structure in fresh and bright colours**

composition

**vinyl coat, cotton/polyester backing**

width

**± 137-140 cm, ± 54-55 inches**

weight

**backing: ± 110 gr/m<sup>2</sup>, ± 5 oz/yd<sup>1</sup>**

**coating: ± 690 gr/m<sup>2</sup>, ± 31 oz/yd<sup>1</sup>**

thickness

**1.1 mm, 0.04 inches**

flame retardancy

**EN 1021/1-2**

**BS 5852, crib 5**

**NF P 92/503 - 507, M2**

**NF D60-013 (AM 18)**

**DIN 4102, B2**

**UNI 9175, classe 1 IM**

**Cal TB 117**

**NFPA 260, class 1**

**IMO 2010 FTP part 8**

abrasion

**ISO 12947-2**

> 300.000 rubs martindale

**ASTM D4157**

100.000 double rubs wyzenbeek

colorfastness to crocking

**ISO 105-X12**

wet 5 / dry 5 (scale 1-5)

**AATCC 8**

wet 5 / dry 5 (scale 1-5)

colorfastness to light

**ISO 105-B02**

7 (scale 1-8)

**ASTM D4329: 150 hours**

4 (scale 1-5)

resistance to blood, urine, sweat and sebum

**EN 12720**

5 (scale 1-5)

breaking strength

**ISO 1421**

length 470 N / width 313 N

**ASTM D2261**

length 7.3 lbs / width 9.2 lbs

flexibility

**ISO 7854**

400.000 cycles

adhesion to coating

**ASTM D751**

length 8.3 lbf / width 5.2 lbf




**vinyl**   
COMMITTED TO  
SUSTAINABLE DEVELOPMENT


# arrow

7055.01 - 7055.23


---




7055.01




7055.02




7055.03




7055.04




7055.05




7055.06




7055.07




7055.08




7055.09




7055.10




7055.11




7055.12



7055.13




7055.14



7055.15




7055.16




7055.17




7055.18




7055.19




7055.20



7055.21



7055.22



7055.23