


arrow

7055.01 - 7055.23

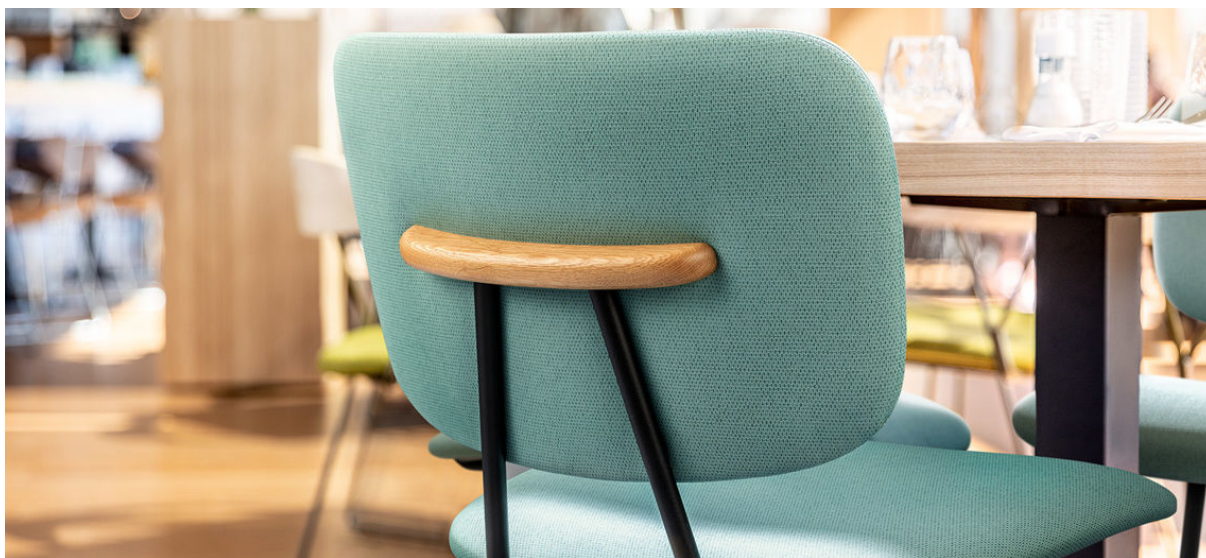

binder

upholstery

03

vinyl

description

two-tone weave structure in fresh and bright colours

composition

vinyl coat, cotton/polyester backing

width

± 140 cm, ± 55 inches

weight

backing: ± 110 gr/m², ± 5 oz/yd¹

coating: ± 690 gr/m², ± 31 oz/yd¹

thickness

1.1 mm, 0.04 inches

roll length

± 20 meter, ± 22 yards

flame retardancy

EN 1021/1-2

BS 5852, crib 5

NF P 92/503 - 507, M2

NF D60-013 (AM 18)

DIN 4102, B2

UNI 9175, classe 1

Cal TB 117

NFPA 260, class 1

IMO 2010 FTP part 8

abrasion

ISO 12947-2

> 125.000 rubs martindale

ASTM D4157

50.000 double rubs wyzenbeek

colorfastness to crocking

ISO 105-X12

wet 5 / dry 5 (scale 1-5)

AATCC 8

wet 4-5 / dry 4 (scale 1-5)

colorfastness to light

ISO 105-B02

8 (scale 1-8)

AATCC 16.3: 40 hours

5 (scale 1-5)

resistance to urine

good

resistance to sebum

good

breaking strength

ISO 1421

length 475 N / width 320 N

ASTM D5034

warp 113 lbs / weft 90 lbs

flexibility

ISO 5402


> 20.000




vinyl 
COMMITTED TO
SUSTAINABLE DEVELOPMENT

arrow


7055.01 - 7055.23




7055.01




7055.02




7055.03




7055.04




7055.05




7055.06




7055.07




7055.08




7055.09




7055.10




7055.11




7055.12



7055.13




7055.14



7055.15




7055.16




7055.17




7055.18




7055.19




7055.20



7055.21



7055.22



7055.23