


hestan

7035.01 - 7035.30

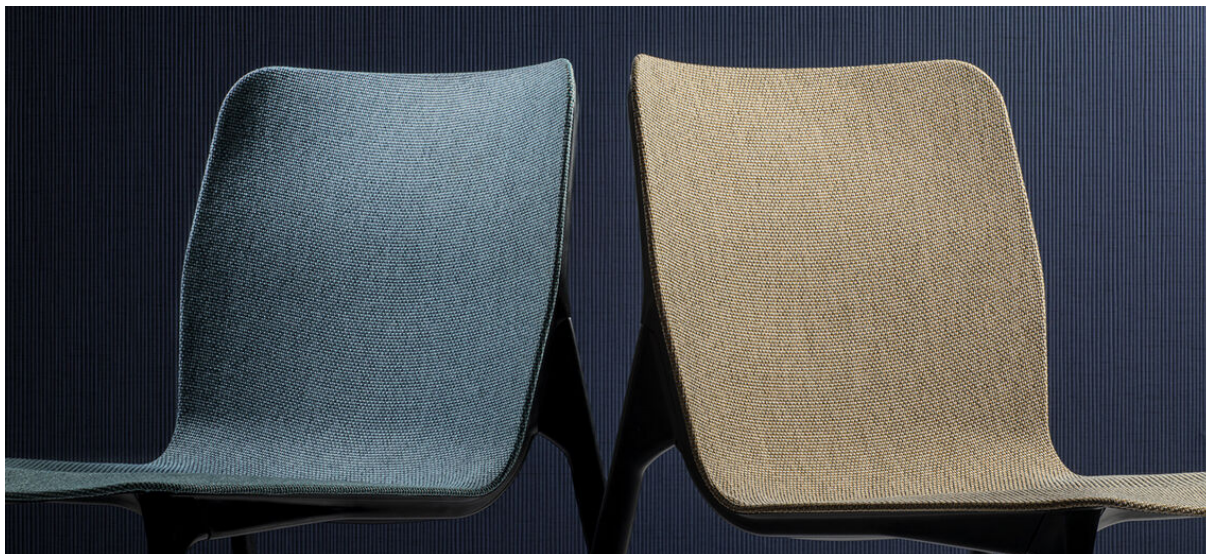

binder

upholstery

descrizione

un tessuto grezzo semi-uni

composizione

**> 37% recycled polyester FR / < 63%
polyester FR**

altezza

± 140 cm, ± 55 inches

peso

± 570 gr/m¹, ± 18 oz/yd¹ fabrics

resistenza al fuoco

EN 1021/ 1- 2

BS 5852, crib 5

NF P 92 / 503 - 507, M1

DIN 4102, B1

IMO 2010 FTP part 8

UNI 9175, classe 1 IM

Cal TB 117

resistenza all'abrasione

ISO 12947-2

60.000 rubs martindale

ASTM D4157

100.000 double rubs wyzenbeek

resistenza al pilling

ISO 12945-2

4-5 (scala 1-5)

ASTM D3511

4-5 (scala 1-5)

solidità allo sfregamento

ISO 105-X12

bagnato 4-5 / asciutto 4-5 (scala 1-5)

AATCC 8

bagnato 5 / asciutto 5 (scala 1-5)

resistenza alla luce

ISO 105-B02

6 (scala 1-8)

AATCC 16.3: 40 hours

5 (scala 1-5)

resistenza al taglio cucitura

ISO 13936 - 2

catena 2.7 mm / trama 2.7 mm

ASTM D4034

catena 83 lbf / trama 91 lbf

resistenza alla trazione

ASTM D5034

warp 353 lbs / weft 377 lbs

manutenzione



restringimento: catena -1.5% / trama -1.5%



restringimento: catena -2.9% / trama -3.0%



STANDARD
100

S07-0023
Hohenstein HTTI

hestan

7035.01 - 7035.30



7035.01



7035.02



7035.03



7035.04



7035.05




7035.06




7035.07




7035.08



7035.09




7035.10




7035.11




7035.12



7035.13




7035.14




7035.15




7035.16




7035.17



7035.18




7035.19



7035.20



7035.21




7035.22



7035.23



7035.24




7035.25



7035.26




7035.27



7035.28



7035.29



7035.30