


sindo

8027.01 - 8027.37

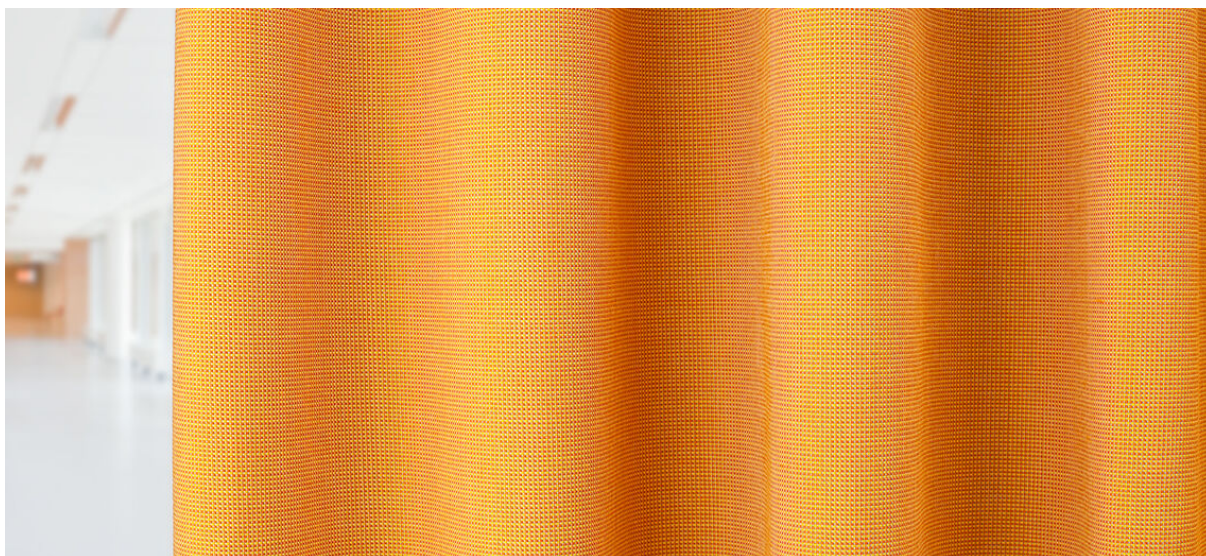

binder

curtain 01

omschrijving

licht gemêleerde uni gordijnstof in 100% brandvertragend polyester

samenstelling

100% brandvertragend polyester

breedte

± 140 cm, ± 55 inches

gewicht

± 297 gr/m¹, ± 10 oz/yd¹ fabrics

visueel & thermisch comfort

EN 410/EN 14501

brandwerendheid

EN 13773, class 1

BS 5867-2, type C

NF P 92/503-507, M1

DIN 4102, B1

UNI VF 8456-8457, classe 1

IMO 2010 FTP part 7

NFPA 701

CAN ULC S109

wrijftechtheid

ISO 105-X12

nat 4-5 / droog 4-5 (schaal 1-5)

AATCC 8

nat 5 / droog 5 (schaal 1-5)

lichtechtheid

ISO 105-B02

licht 6 / donker 6-7 (schaal 1-8)

AATCC 16.3: 60 hrs

4-5 (schaal 1-5)

naadschuifweerstand

ISO 13936-2

ketting 4 mm / inslag 4 mm

ASTM D434

ketting 44 lbs / inslag 52 lbs

aanvullende informatie

speciaal ontwikkeld en geproduceerd voor de zorgsector

onderhoud




krimp: ketting -1.8% / inslag -1.2%




sindo


8027.01 - 8027.37




8027.03




8027.02




8027.01




8027.05




8027.06




8027.07



8027.11




8027.19



8027.12




8027.04




8027.17




8027.09



8027.13




8027.10




8027.24




8027.21




8027.23




8027.25




8027.36




8027.33




8027.28




8027.22




8027.26




8027.30




8027.27




8027.34



8027.37




8027.35




8027.14




8027.15




8027.18



8027.08




8027.16




8027.20



8027.31



8027.29



8027.32