


# delos

8082.01 - 8082.24

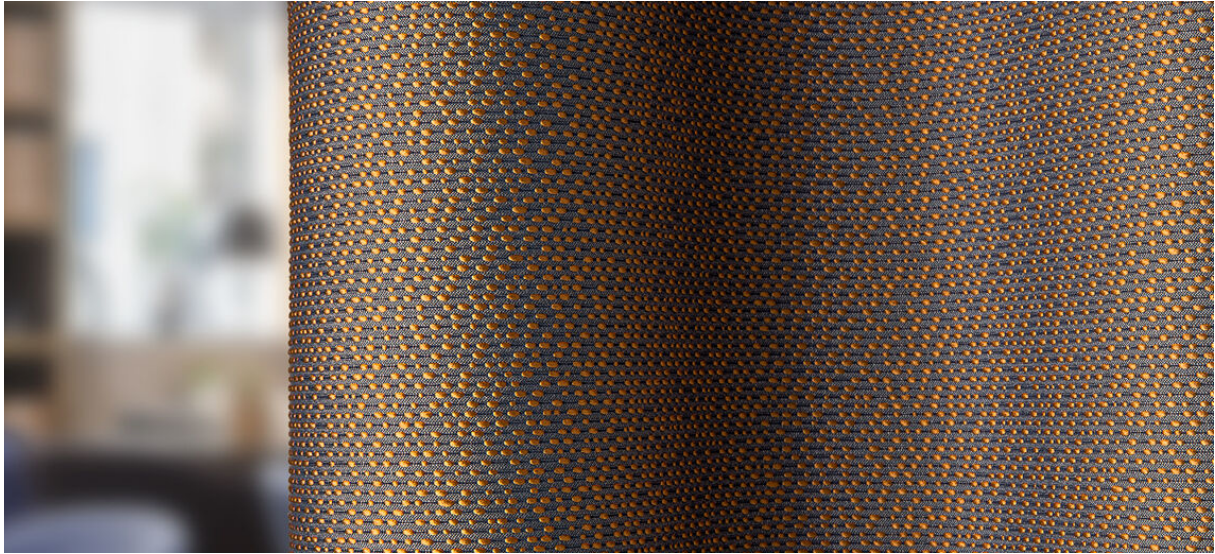

binder  
**curtain**

description  
**allover 3D structured weave with a two-tonal coloured, sheen yarn effect**

composition  
**100% flame retardant polyester**

width  
**± 54 inches, ± 136 cm**

weight  
**± 11 oz/yd<sup>1</sup>, ± 354 gr/m<sup>1</sup> fabrics**

visual & thermal comfort  
**EN 410/EN 14501**

flame retardancy  
**EN 13773, class 1**  
**BS 5867-2, type C**  
**NF P 92/503-507, M1**  
**DIN 4102, B1**  
**UNI VF 8456-8457, classe 1**  
**IMO 2010 FTP part 7**  
**NFPA 701**  
**CAN/ULC S109**

colorfastness to crocking  
**ISO 105-X12**  
wet 4-5 / dry 4-5 (scale 1-5)  
**AATCC 8**  
wet 5 / dry 5 (scale 1-5)

colorfastness to light

**ISO 105-B02**  
6 (scale 1-8)  
**AATCC 16.3: 60 hours**  
4.5 (scale 1-5)

seam slippage  
**ISO 13936-2**  
warp 3.6 mm / weft 3.6 mm  
**ASTM D434**  
warp 46 lbs / weft 65 lbs

care



**shrinkage: warp: -2.1% / weft: -1.5%**




STANDARD  
100  
S07-0023  
Hohenstein HTTI




# delos

8082.01 - 8082.24


---




8082.01




8082.02




8082.03




8082.04




8082.05




8082.06




8082.07




8082.08



8082.09




8082.10




8082.11




8082.12



8082.13



8082.14




8082.15




8082.16




8082.17




8082.18




8082.19




8082.20




8082.21



8082.22



8082.23



8082.24