


dalma

7024.01 - 7024.22



binder	colorfastness to crocking
upholstery	ISO 105-X12
vinyl	wet 5 / dry 5 (scale 1–5)
	AATCC 8
description	wet 5 / dry 5 (scale 1–5)
silk woven structure	colorfastness to light
	ISO 105-B02
composition	7 (scale 1–8)
vinyl coat, cotton/polyester backing	ASTM D4329: 150 hours
width	4 (scale 1–5)
± 54-55 inches, ± 137-140 cm	resistance to blood, urine, sweat and sebum
weight	EN 12720
backing: ± 110 gr/m², ± 5 oz/yd¹	5 (scale 1–5)
coating: ± 690 gr/m², ± 31 oz/yd¹	breaking strength
thickness	ISO 1421
1.1 mm, 0.04 inches	length 475 N / width 313 N
flame retardancy	ASTM D2261
EN 1021/1-2	length 7.3 lbs / width 9.2 lbs
BS 5852, crib 5	flexibility
NF P 92/503 – 507, M2	ISO 7854
NF D60-013 (AM 18)	400.000 cycles
DIN 4102, B2	adhesion to coating
UNI 9175, classe 1 IM	ASTM D751
Cal TB 117	length 8.3 lbf / width 5.2 lbf
NFPA 260, class 1	
IMO 2010 FTP part 8	
abrasion	
ISO 12947-2	
> 300.000 rubs martindale	
ASTM D4157	
100.000 double rubs wyzenbeek	

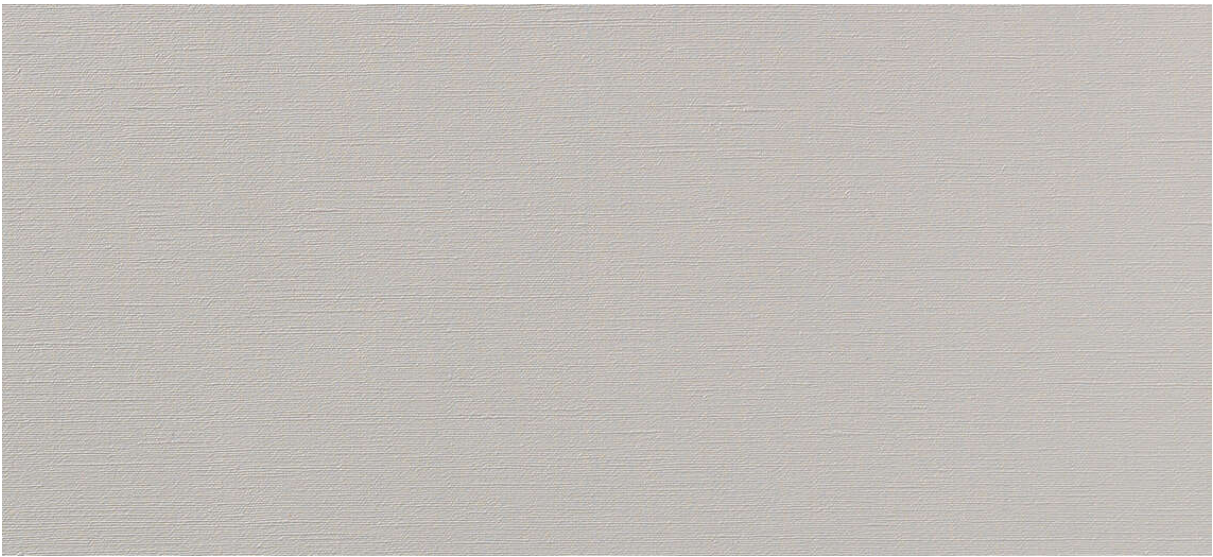

dalma

7024.01 - 7024.22



7024.01



7024.02



7024.03



7024.04




7024.05




7024.06



7024.07



7024.08



7024.09



7024.10



7024.11



7024.12




7024.13



7024.14



7024.15




7024.16



7024.17



7024.18



7024.19



7024.20



7024.21



7024.22