


arches

7066.01 - 7066.17




binder	耐擦拭
upholstery	ISO 105—X12
vinyl	wet 5 / dry 5 (scale 1—5)
描述	AATCC 8
动态织物结构	wet 5 / dry 5 (scale 1—5)
组成	耐褪色
发泡PVC,加棉或涤底	ISO 105—B02
宽度	7 (scale 1—8)
± 137-140 cm, ± 54-55 inches	ASTM D4329: 150 hours
重量	4 (scale 1—5)
底层: ± 110 gr/m ² , ± 5 oz/yd ¹	耐血液，尿液，汗液和皮肤脂肪
涂层: ± 690 gr/m ² , ± 31 oz/yd ¹	EN 12720
厚度	5 (scale 1—5)
1,1 mm, 0,04 inches	屈伸强度
阻燃	ISO 1421
EN 1021/1—2	length 470 N / width 313 N
BS 5852, crib 5	ASTM D2261
NF P 92/503 — 507, M2	length 7 lbs / width 9 lbs
NF D60—013 (AM 18)	灵活性
DIN 4102, B2	ISO 7854
UNI 9175, classe 1 IM	400,000 cycles
Cal TB 117	涂层粘结力
NFPA 260, class 1	ASTM D751
IMO 2010 FTP part 8	length 8 lbf / width 5 lbf
耐磨性	
ISO 12947—2	
> 300,000 rubs martindale	
ASTM D4157	
100,000 double rubs wyzenbeek	

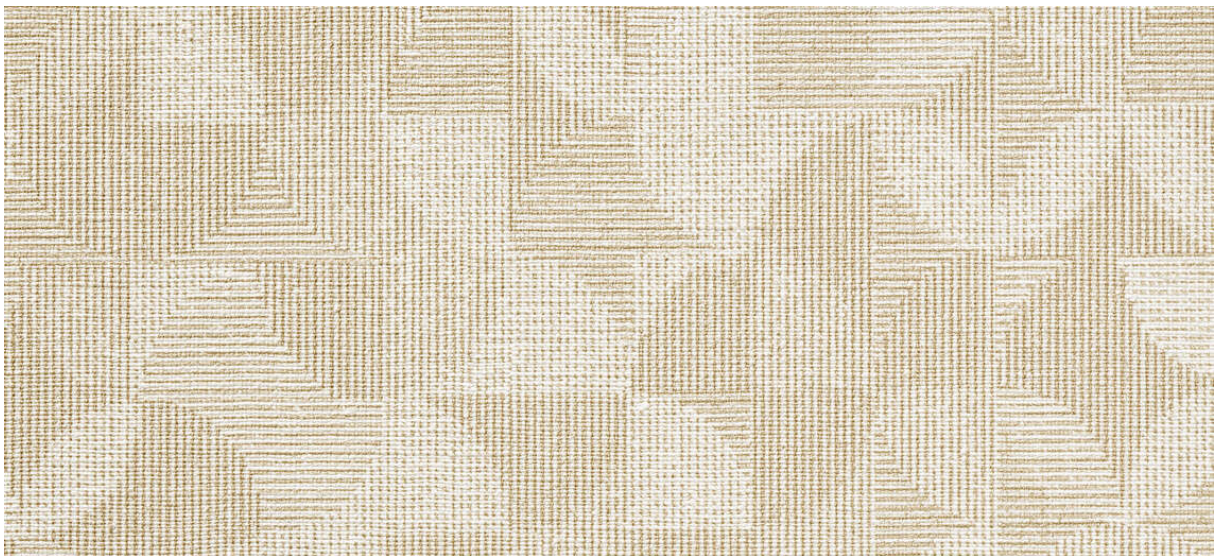


arches

7066.01 - 7066.17




7066.01




7066.02




7066.03




7066.04




7066.05




7066.06




7066.07




7066.08




7066.09




7066.10




7066.11



7066.12




7066.13




7066.14



7066.15



7066.16



7066.17